

UNIVERSITY OF BOLTON

WESTERN INTERNATIONAL COLLEGE FZE

BEng (Hons) MECHANICAL ENGINEERING

SEMESTER ONE EXAMINATION 2018/2019

MECHANICS OF MATERIALS AND MACHINES

MODULE NO: AME5012

Date: Tuesday 15th January 2019

Time: 10:00am – 12:00pm

INSTRUCTIONS TO CANDIDATES:

There are **FIVE** questions on this paper.

Answer any **FOUR** questions

All questions carry equal marks.

Marks for parts of questions are shown in brackets.

Electronic calculators may be used provided that data and program storage memory is cleaned prior to the examination.

CANDIDATES REQUIRE:

Formula Sheet (attached)
Graph Paper

Western International College FZE
 BEng (Hons) Mechanical Engineering
 Semester 1 Examination 2018/2019
 Mechanics Of Materials And Machines
 Module No. AME5012

Q1 For the simply supported overhanging beam AC of length 10m which is supported at A and B shown in **Figure Q1**, use Macaulay's method to determine:

- the slope and deflection equations for the beam (16 marks)
- the slope at A and B (6 marks)
- the deflection at D (3 marks)

Take Flexural rigidity, $EI = 20 \times 10^6 \text{ Nm}^2$

Given Length; AD=1m; DE=1m; EB=6m; BC=2m

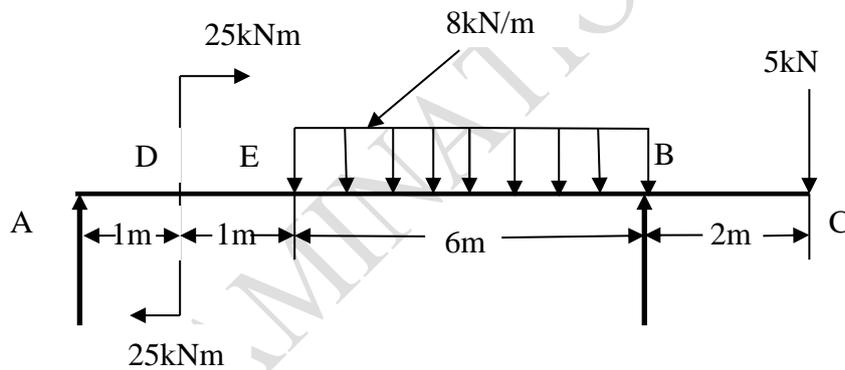


Figure Q1 simply supported overhanging beam

Total 25 marks

Q2. A damped spring-mass system with mass $m = 30\text{kg}$, spring stiffness $k = 55 \text{ kN/m}$ and damping ratio $\xi = 0.25$ is subjected to a simple harmonic disturbing force of $60 \cos 20t$ newtons.

Determine :

- the amplitude and phase lag of the steady state vibrations (12 marks)

**Q2 continued over the page
 Please turn the page**

Western International College FZE
BEng (Hons) Mechanical Engineering
Semester 1 Examination 2018/2019
Mechanics Of Materials And Machines
Module No. AME5012

Q2 continued.

b) the amplitude of the steady state vibration when $\omega = \omega_n$ (4 marks)

c) the frequency of the varying force which will give maximum amplitude and the value of this maximum amplitude. (9 marks)

Total 25 marks

Q3 An element of steel material is subjected to a two dimensional stress system as shown in **Figure Q3**.

a) Using a scale of 1 cm = 5 MPa, construct Mohr's stress circle (8 marks)

and hence determine :

(i) The magnitude of the principal stresses (3 marks)

(ii) The magnitude of the maximum shear stress (3 marks)

(iii) The normal and shear stresses on the plane AB (3 marks)

Q3 continued over the page

Please turn the page

Q3 continued.

- b) Confirm the magnitude of the principal stresses by calculation. (8 marks)

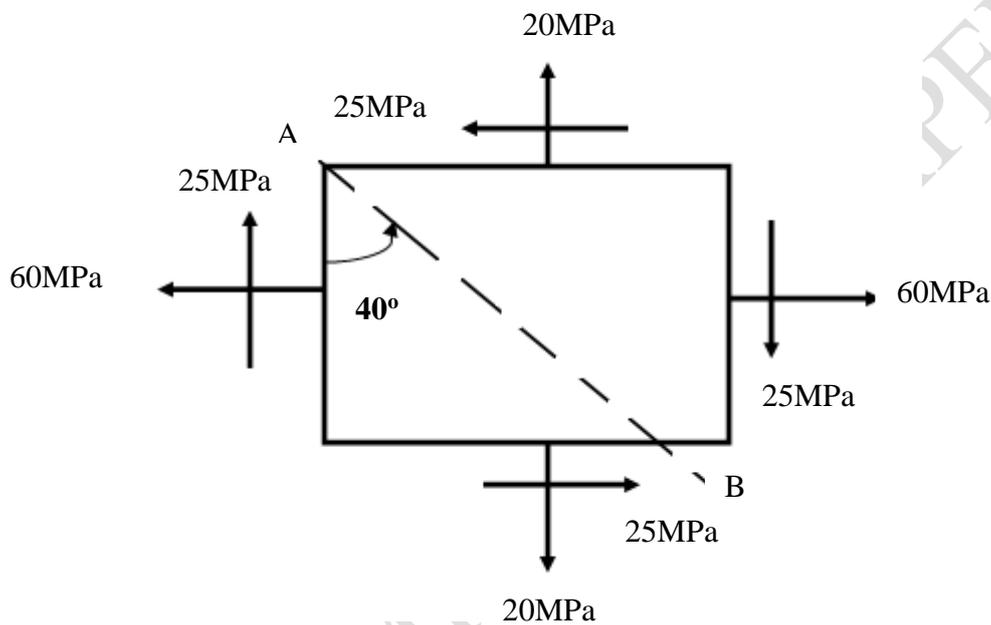


Figure Q3. Two dimensional stress system

Total 25 marks

- Q4 A thick walled cylinder is subjected to an internal pressure of 70MPa. If the cylinder internal diameter is 12cm and external diameter is 18cm, determine the following:

- the circumferential (hoop) stress at the inside and outside radii (8 marks)
- the longitudinal stress across the wall section (3 marks)
- the change in the internal diameter and the change in length due to the internal pressure if the original length is 6m. (6 marks)

Western International College FZE
 BEng (Hons) Mechanical Engineering
 Semester 1 Examination 2018/2019
 Mechanics Of Materials And Machines
 Module No. AME5012

**Q4 continued over the page
 Please turn the page**

Q4 continued...

- d) sketch the distribution of the circumferential and radial stresses across the wall section indicating also the longitudinal stress. (8 marks)

Take Modulus of elasticity, $E = 200\text{GPa}$ & Poisson's ratio, $\nu = 0.25$

Total 25 marks

- Q5 **Figure Q5** shows a 45° rectangular strain gauge rosette which is bonded to the surface of a steel structural member.

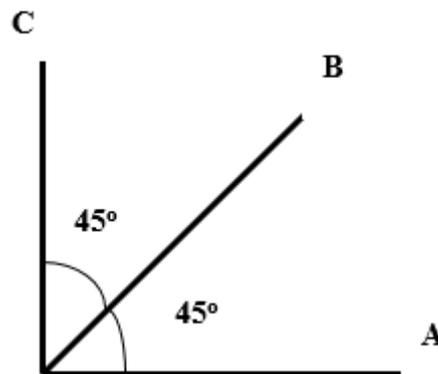


Figure Q5 45° rectangular strain gauge rosette

When the structure is loaded the strain readings are :

Gauge A : 500×10^{-6}

Gauge B : -120×10^{-6}

Gauge C : 200×10^{-6}

- a) Construct and label Mohr's strain circle to a scale of $1\text{cm} = 100 \times 10^{-6}$ (10 marks)
- b) Super-impose Mohr's stress circle onto the strain circle. (5 marks)

Western International College FZE
BEng (Hons) Mechanical Engineering
Semester 1 Examination 2018/2019
Mechanics Of Materials And Machines
Module No. AME5012

**Q5 continued over the page
Please turn the page**

Q5 continued...

- c) From the two circles, determine :
- (i) The principal strains (2 marks)
 - (ii) The principal stresses (4 marks)
- d) Verify the magnitudes of the principal stresses using appropriate formula. (4 marks)

Take Modulus of elasticity, $E = 200 \text{ GPa}$, Poisson's ratio $\nu = 0.3$

Total 25 marks

END OF QUESTIONS

Western International College FZE
 BEng (Hons) Mechanical Engineering
 Semester 1 Examination 2018/2019
 Mechanics Of Materials And Machines
 Module No. AME5012

Please turn over for Formula Sheet

FORMULA SHEET

Deflection

$$EI \frac{d^2y}{dx^2} = M$$

Complex Stress

$$\sigma_{\theta} = \frac{\sigma_x + \sigma_y}{2} + \left(\frac{\sigma_x - \sigma_y}{2} \right) \cos 2\theta - \tau \sin 2\theta$$

$$\tau_{\theta} = \left(\frac{\sigma_x - \sigma_y}{2} \right) \sin 2\theta + \tau \cos 2\theta$$

$$\tan 2\theta_p = \frac{-2\tau}{\sigma_x - \sigma_y}$$

Complex Strain

$$\text{Radius of stress circle} = \frac{(1-\nu)}{(1+\nu)} \times \text{Radius of strain circle}$$

$$\text{Stress circle} = \frac{E}{(1-\nu)} \times \text{strain scale}$$

$$\sigma_1 = \frac{E(\epsilon_1 + \nu\epsilon_2)}{1-\nu^2} \quad \sigma_2 = \frac{E(\epsilon_2 + \nu\epsilon_1)}{1-\nu^2}$$

Thick Cylinder

Lame' Equations

$$\sigma_c = A + \frac{B}{r^2}, \quad \sigma_R = A - \frac{B}{r^2}$$

Strain Format

Western International College FZE
 BEng (Hons) Mechanical Engineering
 Semester 1 Examination 2018/2019
 Mechanics Of Materials And Machines
 Module No. AME5012

$$\varepsilon_x = +\frac{\sigma_x}{E} - \nu \frac{\sigma_y}{E} - \nu \frac{\sigma_z}{E}$$

Please turn the page

Vibrations

$$f_n = \frac{\omega_n}{2\pi} \quad \omega_n = \sqrt{\frac{k}{m}}$$

$$\text{Damped} \quad f_d = \frac{\omega_d}{2\pi} \quad \omega_d = \omega_n \sqrt{1 - \xi^2}$$

$$\text{Log Decrement} \quad \ell_n \frac{x_1}{x_r} = \frac{2\pi(r-1)\xi}{\sqrt{1-\xi^2}}$$

$$\text{Critical Damping} \quad C_c = 2m\omega_n \quad \xi = \frac{C}{C_c}$$

$$\text{Forced} \quad X_0 = \frac{F/K}{\sqrt{(2\xi r)^2 + (1-r^2)^2}} \quad \phi = \tan^{-1} \frac{2\xi r}{1-r^2}, \quad r = \frac{\omega}{\omega_n}$$

$$r_{\text{res}} = \sqrt{1 - 2\xi^2}, \quad r_{\text{res}} = \frac{\omega_{\text{res}}}{\omega_n}$$

$$\text{Transmissibility} \quad F_T = \sqrt{(kX_0)^2 + (c\omega X_0)^2}$$

END OF PAPER